

# Loading Methods

## Method One




For aircraft 3,500lbs. / 1,580kg or less, wrap the axle strap around the gear leg then attach the winch strap to the axle strap and carefully tighten.

## Method Two



Wheel the 4K PlaneSkate™ up to the distressed tire, chock both forward wheels of the PlaneSkate™, and tow the distressed aircraft onto the 4K PlaneSkate™ tray. Once in place, secure aircraft with winch strap and any additional straps as necessary

## Method Three

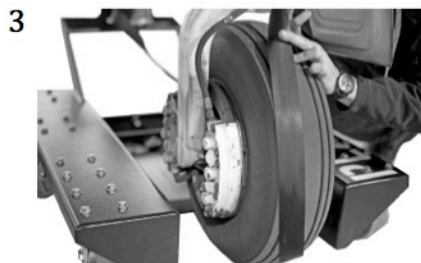

For aircraft weighing more than 3,500lbs. / 1,580kg and less than 10,000lbs. / 4,500kg, wrap the winch strap over and around the back of the distressed tire, attaching the strap to the pan on the front of the 4K PlaneSkate™ tray. This will allow the flat tire to be used as a pulley, making the winching process easier.